



# Super-capacity dryers



In addition to eliminating hassles with coins, debit card systems greatly reduce the likelihood of machine vandalism.

What's more, debit cards offer a wealth of opportunities for promotionally minded owners.

## Models MDE/MDG16PR

A perfect match to the Maytag® debit card-ready washer. Our single-load dryer delivers outstanding results, starting with a choice of fabric care drying cycles. And, with our 220-cubic-foot-per-minute diagonal airflow, laundry billows open to dry quickly and efficiently with less wrinkling. Maytag dryers live up to our reputation for unsurpassed performance and years of reliable operation.

## debit card-ready

*Compatible with a variety of systems for greater flexibility!*


### For Your Customers:

- Door opens conveniently from the top of the washer, and the extra-large drum opening makes loading and unloading laundry a breeze.
- One touch selects the proper cycle.
- Display counts down time remaining during cycle.

### For Your Operation:

- DuraCushion™ drum finish is chip- and scratch-resistant to withstand a lifetime of tumbling.
- Maytag Computer Trac® controls let you adjust pricing by cycle, day and time.
- Premium porcelain-enamel top and Tri-Coat™ cabinet protection keep the dryer looking new.
- Optional audit system with two-way data communication.

# Models MDE/MDG16PR

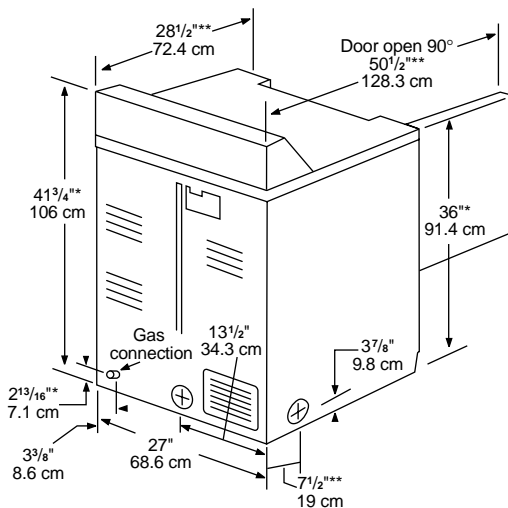

\* Dimensions will vary according to adjustment of leveling legs; add 1/2" min.  
\*\* Includes 3/4" for hinge on back of dryer.



NEW YORK CITY  
M.E.A.



See specific instructions for proper installation.  
Specifications are subject to change without notice.

**Motor:** 1/4 HP, 240 volts (MDE) or 120 volts (MDG), 60 Hz, single-phase, thermoprotected against overload, auto-reset.  
Export models — 240 volts, 50 Hz and 220 volts, 60 Hz.

**Capacity:** 6.0 cubic feet (0.17 cu. m).

**Tumble Speed:** 50 ± 1.5 rpm.

**Lubrication:** Permanent — needs no oil.

**Airflow:** 220 cubic feet (6.2 cu. m) per minute.  
Export models — 180 cubic feet (5.0 cu. m) per minute.

**Exhaust:** Use a minimum of 4-inch (10.2 cm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal or combustible duct.

**Heating Element (MDE Models):** Nichrome helix coil.

**Electrical Rating (MDE Models):** 240 volts, AC, 60 Hz, draws approximately 5,900 watts overall.  
Export models draw approximately 4,900 watts.

**Single Port Burner (MDG Models):** Automatic electric burner ignition.

**Gas Rating (MDG Models):** 24,000 BTU/hr.



**Fuse Requirements:**

MDE models — 30 amp.  
Export models — 20 amp.  
MDG models — 15 amp.

**Automatic Pressure Regulator (MDG Models):**

Self-adjusting valve automatically compensates for variation in gas pressure.

**Leveling Legs:** Adjustable to level dryer for proper installation.

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS		
Number Of 90° Turns		
	4" 10.2 cm	2 1/2" 6.4 cm
Maximum length of 4-inch diameter rigid metal duct.		
0	65 ft. (19.8 m)	59 ft. (18 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	36 ft. (11 m)	30 ft. (9.1 m)
4	28 ft. (8.5 m)	22 ft. (6.7 m)
Maximum length of 4-inch diameter flexible stiff-walled metal duct.		
0	36 ft. (11 m)	28 ft. (8.5 m)
1	32 ft. (9.8 m)	24 ft. (7.3 m)
2	28 ft. (8.5 m)	20 ft. (6.1 m)
3	25 ft. (7.6 m)	17 ft. (5.2 m)
4	23 ft. (7 m)	15 ft. (4.6 m)

Colors: White.

**Approximate Weight (Crated/Uncrated):**


163 lbs. (74 kg)/144 lbs. (65 kg).

For model availability outside the U.S. and Canada, contact:

Maytag International, Inc.  
8700 West Bryn Mawr  
Chicago, IL 60361

Phone: 773-714-0100  
Fax: 773-714-8180

## Quality Features



### Fast And Efficient Drying

Our 220-cubic-foot-per-minute diagonal airflow means fast and efficient drying performance, even with difficult installations.



### Large-Capacity Lint Filter

Durable fine-mesh polyester lint filter is located just inside the door opening for quick and convenient lint removal.



### Easy-Access Reversible Door

The door handle is located at the top for convenience, and the extra-large opening makes loading laundry simple.



### Cushioned Drum Suspension

Permanently lubricated bearings. The cushioned drum rollers assure year after year of smooth, quiet and reliable operation.

## Maytag® Limited Warranty

2 YEARS — All parts.

5 YEARS — External cabinet against rust-through, including the top, baseframe and dryer door.

For a period from the date of original purchase through the times listed above, the designated parts which fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

